


Shy-J3012 Wise & Multi-Function Remote Control (C Type)

(1) Setup Operation: Setting · Input · Output · Wiring Diagram Setup.

(A) Often Close (B) Common Input (C) Often Open

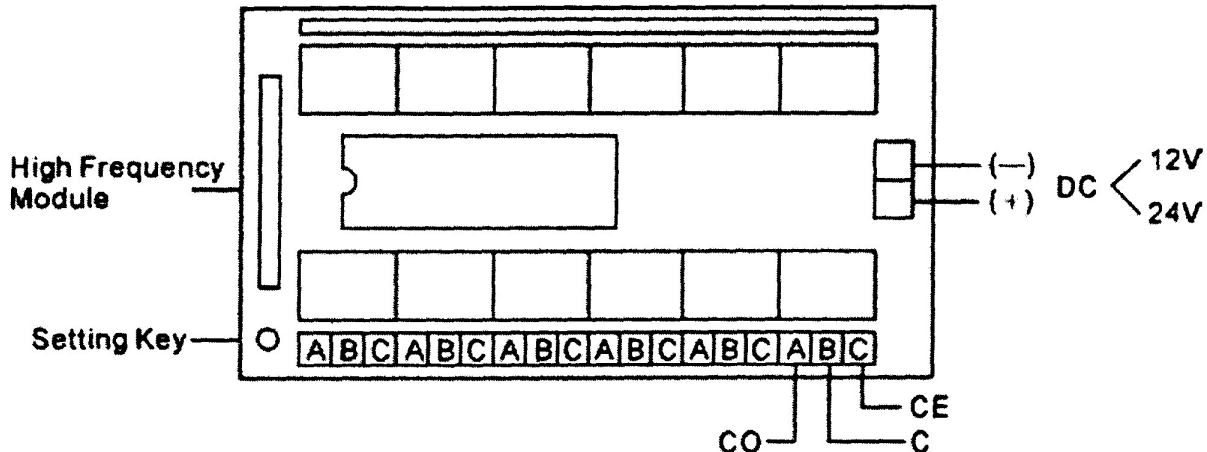

(2) Introduce: HG-412 PC, 12 Ways Wise Receiver Controller.

Use Antenna Receive Coding And Function Setting: Secret High · Stabilization High · Energy Low.

(3) Setting:

(A) Emissive Soldering Coding :1-8

Up ON
Mid No.
Dow OFF



(B) Clear Password: Receiver Setting Key Hold Don 塥 Loose About 10-15sec, The Buzzer Ring And Save Message Clear Was Success.

(4) (A) Receiver Setting Key Push Once Or Twice, Led Bright Or Buzzer Ring

(B) Push Emitter No.3 (No Segment) · No.6 (Independent) · No.9 (Up Open Down Close)

(5) Produces Standards:

(A) Work Voltage: 24VDC

(B) Static Work Current: $\leq 6\text{MA}$

(C) Work Temperature: ? $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$

(D) Receiver Sensitivity: $\geq 105\text{DBM}$

(E) Work Frequency: 315~433MHz

(F) Size: Length 97MM · Width 77MM · Height 26MM ◦